

I-9702LW-NG

Addressable Gas Detector



Description

I-9702LW-NG Addressable Gas Detector is used to detect leakage of home use natural gas in such areas as houses, hotels and apartments. When leakage is detected, the detector will generate high buzzer alert sound, and provide a dry contact to turn exhaust fan, The addressable detector can be linked into GST fire alarm system to carry out intelligent control.


Features and Benefits

- Electronically addressed
- Local buzzer alarm
- Self-diagnostic
- Relay output
- Easy installation

Terminals and Installation Holes

Below figure shows terminals on the isolator base.

Terminal description:



D1, D2: 24VDC power supply, non-polarized

Z1, Z2: Addressable loop, non-polarized

K1, K2: 30VDC/3A normally open contact, closes when detector alarms.

Warning: It's prohibited to connect 220VAC directly through K1 and K2.

Recommended Cabling

1.0mm² or above Fire-resistant cable for Z1 and Z2

2.5mm² or above Fire-resistant cable for D1 and D2


1.0mm² or above Fire-resistant cable for K1 and K2

All cables should be subject to local codes.

Application

The detector is wall mounted type with a bracket.

The detector and the gas stove should be placed in the same room. The detector should be mounted within 30cm -60cm to the floor. The detector should be within 1.5m -4m to the gas resource or the gas stove.

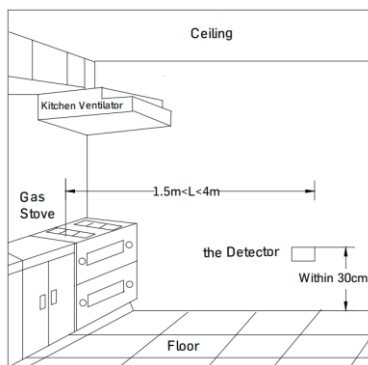

After powered up, the detector will take 4 minutes for warm-up well the green LED flashes, and then it will light constantly for normal monitoring.

If the gas thickness reach alarm threshold to trigger detector alarm, the Alarm/Fault LED flashes red, and the buzzer will sound beep, meanwhile detector will close K1 K2 relay contact, once the gas thickness lower than the alarm threshold, the detector will auto restore to normal state.

Sensor service life expires: The detector will count the usage time of the sensor while it is working. When the accumulated usage time reaches 5 years, the detector will remind the user that the sensor life has expired, and the yellow indicator light will flash Bright. Although the detector still has an alarm function after the life of the sensor expires, it is recommended that the user must replace the detector as soon as possible. There is a Self-Test button on the detector to test if the LEDs and buzzer works normally. Pressing the Self-Test button, the LEDs flash once in turn, and the buzzer sounds three times. After 10 seconds N/O contact will close, the close status will keep for 5 seconds, then back to normal open status.

Order Information

Part No.	I-9702LW-NG
Device Name	Addressable Gas Detector
Product No.	1010XXXX

Technical Specification

Working Voltage	Power: 24VDC (16V~DC28V) non-Polarized Loop: 24V (16V~DC28V) non-Polarized
Power Consumption	Power: Normal states≤0.5W Alarm States≤1W Loop: Normal states≤1mA Alarm States≤2mA
Output Relay Capacity	N/O, 3A 30VDC
Alarm Threshold	10%LEL(methane)
Indicator	Power LED: Green Alarm/Fault LED: Dual color, red when alarming, and yellow in fault. flash yellow once detector sensor end of life
Buzzer	Sounds twice per second when alarming, and once every 10 seconds in fault.
Life of Sensor	5 Years
Ingress Protection	IP30
Working condition	-10°C~ +55°C, ≤95%RH, no condensation
Material	ABS
Weight	~180g
Mounting Hole Distance	60mm
Dimension	φ108mm×55mm

Caution

- 1.Avoid using much hair tonic, pesticide, paint, alcohol, diluents, etc near the detector.
- 2.The detector is only sensitive to NG.
- 3.Don't install the detector at locations with high temperature (near stoves) or too much oil smoke (near kitchen ventilator).
- 4.The detector should be tested every 6 months.
- 5.The detector can be tested by a lighter. The detector should alarm in about 10 seconds.

Accessories and Tools



Part No.: P-9910B
Device name: Handhold Programme
Product No.: 10104894