

DI-M9324

Addressable Automatic/Manual Switch



Description


DI-M9324 Addressable Automatic/Manual Switch is designed for installation in frequently accessed areas. It is used to control the conversion between manual and automatic states of the gas fire extinguishing system. When personnel enter the protected area, the system can be set to manual mode through the Automatic/Manual Switch to prohibit the interlocking start-up of the system. When there are no people in the protected area, the system can be set to automatic mode through the Automatic/Manual Switch, so that the fire alarm system can automatically link the gas fire extinguishing.

Features and Benefits

- Electronically addressed. The address can be set by programmer.
- Using the key rotation method to change the manual automatic state.
- Plug-in structure.

Terminals & Installation

The product can be surface mounted or embedded box installed.

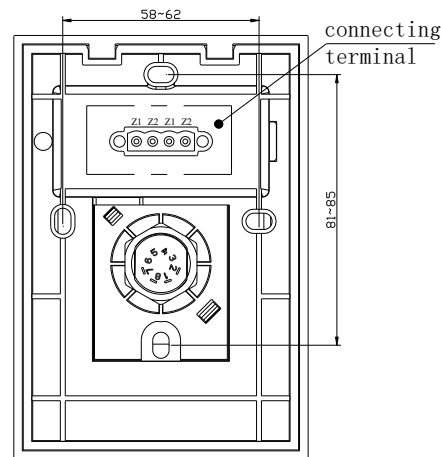

Wiring Instructions:

Z1, Z2: Connecting with loop of the Control Panel, polarity-insensitive.

Recommended Cabling

18-12AWG fire-rated cables shall be used where possible, subject to local codes.

Technical Specification

Operating Voltage	Loop 24V(16V~28V)
Operating Current	≤0.7mA
Indicator Light	AUTO: Yellow MANUAL: Green
Type of the Part	Reusable
Programming Mode	Electronically addressed
Address Range	One address within 1~242.
Wiring	Polarity-insensitive two-wire
Ingress Protection Rating	IP30
Environmental Temperature	-40°C~+55°C
Relative Humidity	≤95%, non-condensing
Material and Color of Enclosure	Plastic (5VA), blue
Dimension (L×W×H)	130mm×90mm×53mm
Mounting Distance	60mm (Width)/83mm (Length)
Weight	About 180g

Accessories and Tools



Part NO. P-9910B
Device Name Handheld Programmer
Product No.: 10104894



Part NO. D-M93WPB
Device Name Common Water-proof Box
Product No.: 10107381

Certificates and Compliance

- RoHS compliant

Order Information

Part NO.	DI-M9324
Device Name	Addressable Automatic/Manual Switch
Product NO.	10107309