

P-9965A


CAN Network Card

P-9965A network card provides CAN Class A network connection to GST-IFP8 panel. All panels are connected in peer to peer topology. In case of cable break among the network, there is still redundancy communication route.


Technical Specification

- Compatible Panel: GST-IFP8 panel
- Communication Protocol: CAN
- Node capacity: 99
- Baud Rate: 10,000
- Cable Requirement: Minimum 1.0 mm² Fire Cable
- Communication Distance: 3000 meters

Typical Connection

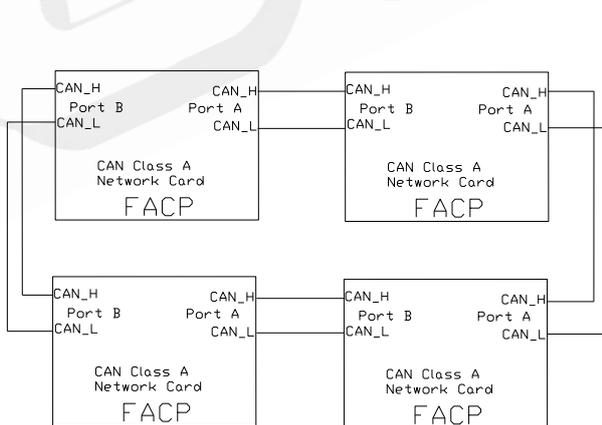

Standard Class A network

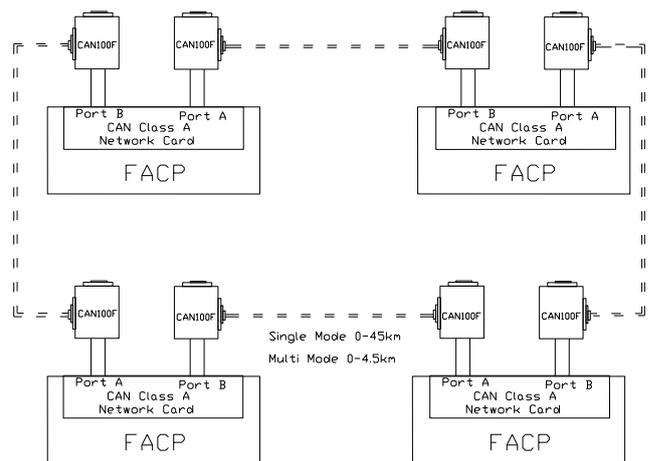

Fiber-Optic Class A network