

# I-9404

## Intelligent Sounder



### Description

I-9404 Intelligent Sounder is an audible notification device, which can be activated by fire alarm control panel. In case of fire condition, by command from the control panel, the sounder will generate strong audible alarm signal to warn people evacuate from the building.

### Features and Benefits


- Two parts structure with base mounted termination allows easy installation
- 16 programmable alarm tones
- Optional power saving mode or hi-consumption mode
- Electronically addressed
- Single/dual address programmable
- Comply with EN54-3

### Certificates and Compliance

- Standards: EN54-3
- Certifications: LPCB

### Terminals and Installation Holes

Terminals and dimensions of the sounder are shown below.

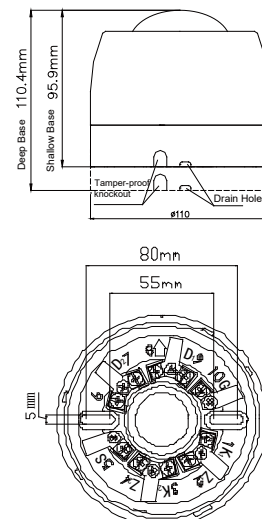

Z1 (2), Z2 (4): Loop, non-polarized  
D1 (9), D2 (7): 24VDC, non-polarized

### Recommended Cabling

1.5mm<sup>2</sup> or above fire cable is recommended, but subject to local codes.

IMPORTANT: This publication is a generic version in which product information is shown for informational purposes only and does not constitute a specific commitment or guarantee. We are constantly pursuing the improvement of product technology to improve product performance, for which we reserve the right to adjust the configuration and technical information of the related products without notice. In addition, the description of system performance in this publication applies only to the usual situation. As a result, there may be a variety of unpredictable special circumstances in the real world, so the realization of the relevant product performance will depend on the professional investigation and analysis and the design plan. Please contact us and we will be happy to provide you with professional advice.



## Application

The Address, tones and working modes can be set through P-9910B handheld programmer. The factory default is tone 14, single address, normal consumption mode.

Mode Code	Tone	Address Quantity	Pre-alarm	Working Mode
1-16	1-16	1	No	Power Saving
17-32	1-16	2	Yes	Power Saving
33-48	1-16	1	No	Normal
49-64	1-16	2	Yes	Normal

When the sounder takes 2 addresses, the 1<sup>st</sup> address will sound in pre-alarm tone.

The sounder sits in GST addressable loop. It can be loop powered or powered by external 24VDC. In loop power mode, the capacity is maximum 20 pieces per loop. Below figures show the typical connection for loop power and external 24VDC power.

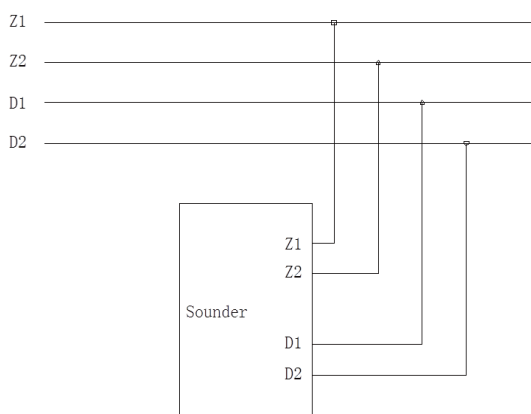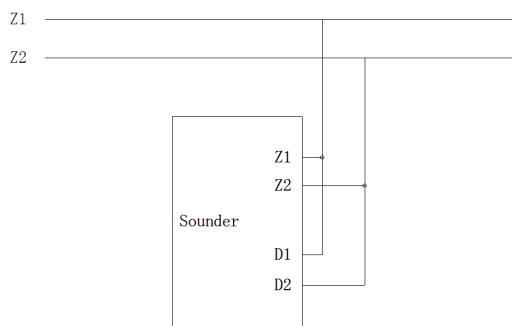

For surface cabling project, an optional deep base can be applied.

## Technical Specification

Operating Voltage	Loop: 24V (20V~28V) Power: 24V (20V~28V)
Standby Current	<b>Power-saving mode:</b> ※ Loop-powered: Loop monitor currents≤2mA Start currents≤7mA ※ External 24V powered Loop monitor currents≤1mA Start currents≤2.5mA Power monitor currents≤1.5mA Start currents≤7mA <b>Normal mode:</b> ※ Loop powered Loop monitor currents≤2mA Start currents≤25mA ※ External 24V powered Loop monitor currents≤1mA Start currents≤2mA Power monitor currents≤1mA Start currents≤25mA
Programming Mode	Electronically addressed
Programming Range	1~242
Ingress Protection Rating	IP33C
Operating Temperature	-10°C ~ +50°C
Relative Humidity	≤95%, non-condensing
Dimension	110mm×95.9mm (shallow base)
Enclosure	ABS
Weight	About 327.2g

## Ordering Information and Compatible Products

Part No.	I-9404
Device Name	Intelligent Sounder
Product No.	10106300
Compatible Panels	GST100 Intelligent Fire Panel GST200-2 Intelligent Fire Panel GST200N Intelligent Fire Panel GST- IFP8 Intelligent Fire Panel

## Accessories and Tools



Part No.: P-9910B  
Device name: Handheld Programmer  
Product No.: 10104894



Part No.: C-94DB  
Device name: Deep Base  
Product No.: 30203792