DI-M9205D

Manual Pull Station(Dual Action)

SIGNALING
Fire Alarm
Subassembly
LISTED

Description

DI-M9205D Manual Pull Station(Dual Action) can be connected to the loop of GST Intelligent Fire Alarm Control Panel. The Pull Station is designed for installation in frequently accessed areas. When there is a fire, the operator can pull down the handle of the Pull Station to send a fire signal to the Control Panel. After receiving the signal, the control panel will show address information of the Pull Station and generate alarm sound.

Features and Benefits

- Electronically addressed. The address can be modified in field.
- It adopts a pull-down start method and can be reset with a dedicated key.
- The terminal block is of a plug-in structure, which is convenient for installation.
- Standards: UL38.

Terminals & Installation

The terminals and mounting holes of the Pull Station are shown below.

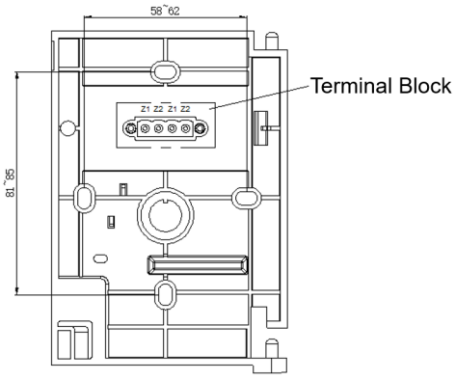

Wiring Instructions:

Z1/Z2: Connect to the loop of control panel (non-polarized).

Recommended Cabling

18-12AWG fire-rated cables should be used where possible, subject to local codes.

IMPORTANT: This publication is a generic version in which product information is shown for informational purposes only and does not constitute a specific commitment or guarantee. We are constantly pursuing the improvement of product technology to improve product performance, for which we reserve the right to adjust the configuration and technical information of the related products without notice. In addition, the description of system performance in this publication applies only to the usual situation. As a result, there may be a variety of unpredictable special circumstances in the real world, so the realization of the relevant product performance will depend on the professional investigation and analysis and the design plan. Please contact us and we will be happy to provide you with professional advice.

© Gulf Security Technology Co., Ltd.

Technical Specification

Operating Voltage	Loop 24V (16V~28V)
Standby Current	≤0.5mA
Alarm Current	≤0.5mA
Type of the Part	Reusable
Addressing Method	Electronically addressed
Address Range	One address within 1~242.
Wiring	Polarity-insensitive two-wire
Ingress Protection Rating	IP30(Not evaluated by UL)
Environmental Temperature	-40℃~+55℃(Not evaluated by UL)
Relative Humidity	≤95%, non-condensing(Not evaluated by UL)
Material and Color of Enclosure	Plastic (5VA), red
Dimension (L×W×H)	130mm×93mm×47mm
Mounting Hole Distance	60mm (Width)/83mm (Length)
Weight	About 200g

Accessories and Tools

Part NO. P-9910B
Device Name Handheld Programmer
Product No.: 10104894

Part NO. D-M93WPB
Device Name Common Water-proof Box
Product No.: 10107381

Certificates and Compliance

- Standards: UL38
- Certifications: UL Listed
- RoHS compliant

Order Information

Part NO.	DI-M9205D
Device Name	Manual Pull Station(Dual Action)
Product NO.	10107630

IMPORTANT: This publication is a generic version in which product information is shown for informational purposes only and does not constitute a specific commitment or guarantee. We are constantly pursuing the improvement of product technology to improve product performance, for which we reserve the right to adjust the configuration and technical information of the related products without notice. In addition, the description of system performance in this publication applies only to the usual situation. As a result, there may be a variety of unpredictable special circumstances in the real world, so the realization of the relevant product performance will depend on the professional investigation and analysis and the design plan. Please contact us and we will be happy to provide you with professional advice.

© Gulf Security Technology Co., Ltd.