DI-M9320/DI-M9320Y

Addressable Manual Release Station

SIGNALING
UL
LISTED
Fire Alarm
Subassembly

Description

DI-M9320 Addressable Manual Release Station can be connected to the loop of GST-GP01 Gas Releasing Control Panel (Control Panel). The Release Station is designed for installation in frequently accessed areas. When manual gas release is required, the operator can pull down the handle of the Release Station to send a start signal to the Gas Releasing Control Panel. Upon receiving the signal, the Panel will initiate a delayed gas release sequence, simultaneously display the address information of the Release Station and generate an alarm sound.

Features and Benefits

- Electronically addressed. The address can be set by programmer.
- Pull down to activate, can be reset with a dedicated key.
- Plug-in structure.

Terminals & Installation

The product can be surface mounted or embedded box installed.

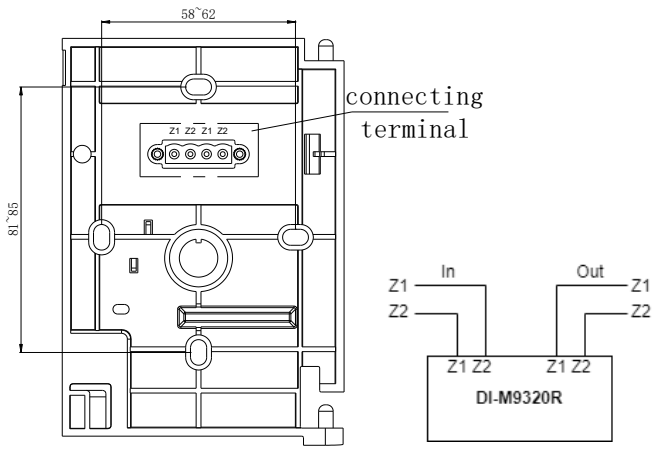

Wiring Instructions:

Z1/Z2: Connect to the loop of control panel (non-polarized). Incoming line: Z1, Z2 on left; Outgoing line: Z1, Z2 on right

Recommended Cabling

18-12 AWG fire-rated cables shall be used where possible, subject to local codes.

IMPORTANT: This publication is a generic version in which product information is shown for informational purposes only and does not constitute a specific commitment or guarantee. We are constantly pursuing the improvement of product technology to improve product performance, for which we reserve the right to adjust the configuration and technical information of the related products without notice. In addition, the description of system performance in this publication applies only to the usual situation. As a result, there may be a variety of unpredictable special circumstances in the real world, so the realization of the relevant product performance will depend on the professional investigation and analysis and the design plan. Please contact us and we will be happy to provide you with professional advice.

© Gulf Security Technology Co., Ltd.

Technical Specification

Operating Voltage	Loop 24V (16V~28V)
Standby Current	≤0.5mA
Alarm Current	≤1.1mA
Type of Initiating Part	Reusable
Initiating Mode	Manually lift the "transparent baffle" and pull down the " Handle "
Reset Mode	Reset manually with a special key
Programming Mode	Electronically addressed
Address Range	One address within 1~242.
Wiring	Polarity-insensitive two-wire
Ingress Protection Rating	IP30 (Not evaluated by UL)
Environmental Temperature	-40℃~+55℃ (Not evaluated by UL)
Relative Humidity	≤95%, non-condensing (Not evaluated by UL)
Material and Color of Enclosure	PC (5VA), red/yellow
Dimension (L×W×H)	130mm×93mm×47mm
Mounting Hole Distance	60mm (Width)/83mm (Length)
Weight	About 200g

Accessories and Tools

Part NO. P-9910B
Device Name Handheld Programmer
Product No.: 10104894

Part NO. D-M93WPB
Device Name Common Water-proof Box
Product No.: 10107381

Certificates and Compliance

- Standards: UL38
- Certifications: UL Listed
- RoHS compliant

Order Information

Product NO.	Part NO.	Item Name
10107311	DI-M9320	Addressable Manual Release Station (Red)
10107513	DI-M9320Y	Addressable Manual Release Station (Yellow)

IMPORTANT: This publication is a generic version in which product information is shown for informational purposes only and does not constitute a specific commitment or guarantee. We are constantly pursuing the improvement of product technology to improve product performance, for which we reserve the right to adjust the configuration and technical information of the related products without notice. In addition, the description of system performance in this publication applies only to the usual situation. As a result, there may be a variety of unpredictable special circumstances in the real world, so the realization of the relevant product performance will depend on the professional investigation and analysis and the design plan. Please contact us and we will be happy to provide you with professional advice.

© Gulf Security Technology Co., Ltd.