

# DI-M9205S

## Manual Pull Station(Single Action)



### Description


DI-M9205S Manual Pull Station(Single Action) can be connected to the loop of GST Intelligent Fire Alarm Control Panel. The Pull Station is designed for installation in frequently accessed areas. When there is a fire, the operator can pull down the handle of the Pull Station to send a fire signal to the Control Panel. After receiving the signal, the control panel will show address information of the Pull Station and generate alarm sound.

### Features and Benefits

- Electronically addressed. The address can be modified in field.
- It adopts a pull-down start method and can be reset with a dedicated key.
- The terminal block is of a plug-in structure, which is convenient for installation.
- Standards: UL38.

### Terminals & Installation

The terminals and mounting holes of the Pull Station are shown below.

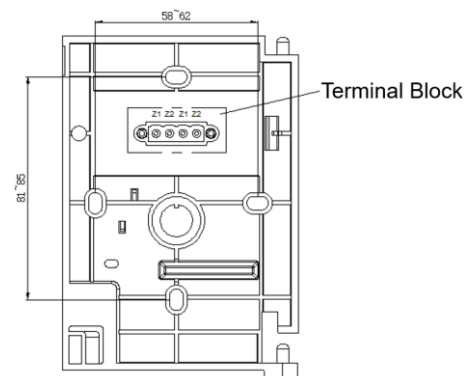

#### Wiring Instructions:

Z1/Z2: Connect to the loop of control panel (non-polarized).

### Recommended Cabling

18-12AWG fire-rated cables should be used where possible, subject to local codes.

## Technical Specification

|                                 |                                           |
|---------------------------------|-------------------------------------------|
| Operating Voltage               | Loop 24V (16V~28V)                        |
| Standby Current                 | ≤0.5mA                                    |
| Alarm Current                   | ≤0.5mA                                    |
| Type of the Part                | Reusable                                  |
| Addressing Method               | Electronically addressed                  |
| Address Range                   | One address within 1~242.                 |
| Wiring                          | Polarity-insensitive two-wire             |
| Ingress Protection Rating       | IP30(Not evaluated by UL)                 |
| Environmental Temperature       | -40°C~+55°C(Not evaluated by UL)          |
| Relative Humidity               | ≤95%, non-condensing(Not evaluated by UL) |
| Material and Color of Enclosure | Plastic (5VA), red                        |
| Dimension (L×W×H)               | 130mm×93mm×47mm                           |
| Mounting Hole Distance          | 60mm (Width)/83mm (Length)                |
| Weight                          | About 200g                                |

## Accessories and Tools



Part NO. P-9910B  
Device Name Handheld Programmer  
Product No.: 10104894



Part NO. D-M93WPB  
Device Name Common Water-proof Box  
Product No.: 10107381

## Certificates and Compliance

- Standards: UL38
- Certifications: UL Listed
- RoHS compliant

## Order Information

|             |                                    |
|-------------|------------------------------------|
| Part NO.    | DI-M9205S                          |
| Device Name | Manual Pull Station(Single Action) |
| Product NO. | 10107629                           |