P-9984EA

Fiber-optical Network Card

Description

P-9984EA Fiber Network Card is optional for GST-IFP2E control panel, providing two LC single-mode optical Fiber interfaces, to build pure fiber-optic Class-A network topology.

Technical Specification

- Compatible Panel: GST-IFP2E
- Nominal Voltage: 5VDC, 200mA
- Communication Interface: single-mode optical fiber interface
- Communication Distance: The distance between two neighbor nodes is less than 20Km
- Node Capacity: 250 panels
- Baud Rate: 100Mbps
- Working condition: -5°C - 50°C, ≤95% non-condensing

Installation and Connection

P-9984EA Fiber Card shall connect to Power Interface Board of the control panel either directly or via another network card, and as shown in Fig.3. Ring network is formed though 2 SC single-mode optical Fiber cable as shown below.

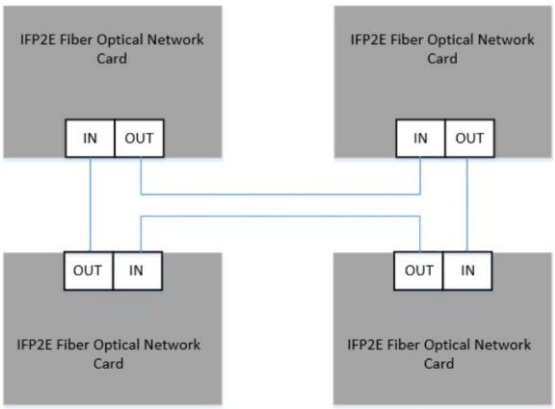

Order Information

Part NO.	P-9984EA
Device Name	Fiber-optical Network Card
Product NO.	20104927

IMPORTANT: This publication is a generic version in which product information is shown for informational purposes only and does not constitute a specific commitment or guarantee. We are constantly pursuing the improvement of product technology to improve product performance, for which we reserve the right to adjust the configuration and technical information of the related products without notice. In addition, the description of system performance in this publication applies only to the usual situation. As a result, there may be a variety of unpredictable special circumstances in the real world, so the realization of the relevant product performance will depend on the professional investigation and analysis and the design plan. Please contact us and we will be happy to provide you with professional advice.

© Gulf Security Technology Co., Ltd.