


# NM-C16

## Master Network Module(16-Channel)

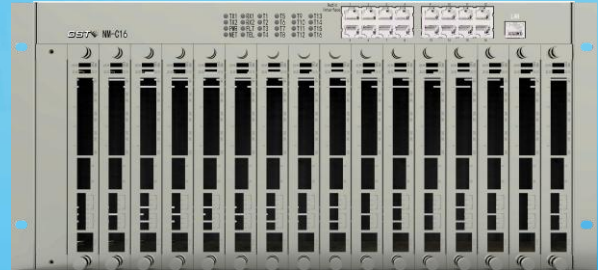

### Description


NM-C16 Master Network Module(16-Channel) connects the GST-FT64(W) Fire Telephone Panel with the switch, provides 16 slots for the NC-1 Network Card, and realizes optical fiber networking between panels.

### Technical Specification

|                        |                                   |
|------------------------|-----------------------------------|
| Operating Power Supply | DC24V                             |
| Power Consumption      | ≤5W                               |
| Audio Interface        | 16 channels                       |
| Network Interface      | 1 channel                         |
| Working Environment    | 0°C -40°C, ≤95%RH, Non-condensing |
| Dimension              | 482.6mm(L)×162mm(W)×221.5mm(H)    |

### Installation & Terminals

Rack-mounted installation

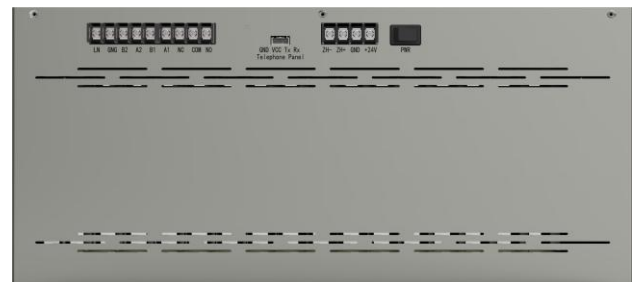

|               |                                         |
|---------------|-----------------------------------------|
| PWR           | Power switch,Default closed state       |
| GND VCC Tx Rx | Connect to GST-FT64(W) Expand interface |
| ZH- ZH+       | Connect to GST-FT64(W) Bus Talking      |
| GND +24V      | Connect to DC24V Power                  |

### Ordering Information

|             |                                    |
|-------------|------------------------------------|
| Part No.    | NM-C16                             |
| Device Name | Master Network Module (16-Channel) |
| Product No. | 30500410                           |